

DHI-HY-C123

Manual Call Point



- Easy Installation: Non-polarized two-wire system, easy for installation and cable-saving
- Easy Maintenance: Simple structure, easy for maintenance

System Overview

The DHI-HY-C123 is a conventional manual call point adapted to conventional fire alarm systems to enrich the system and support manual direct triggering of fire alarms in emergency situations.

Functions

Easy to Find

With red appearance.

Easy Installation

Provide clear indication.

Wide Compatibility

Compatible with third-party Conventional Control Panel.


Scene

It can be widely used as an alarm start switch of fire alarm systems in buildings, and it's generally installed in staircase, hallway, evacuation passage or places frequented by people.


Technical Specification

Voltage	DC 24V
Working Current	5A
Temperature	-10°C to +55°C (14°F to 131°F)
Relative Humidity	≤ 95% (40±2°C)
Color	Red
Dimension	φ140 mm × H45 mm (φ5.51 " × H1.77 ")
Weight	160 g (0.35 lb)

Installation

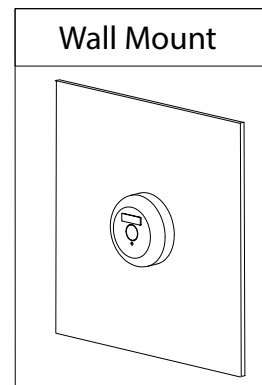

Dimensions (mm/inch)

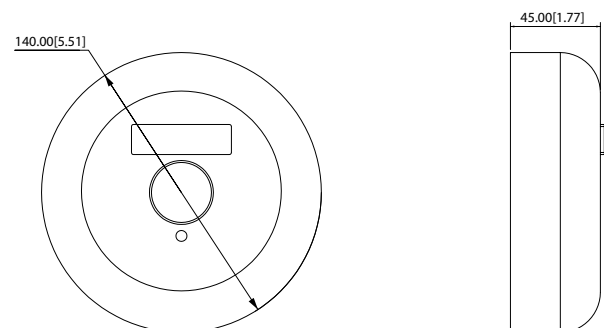

Ordering Information

Type	Model	Description
Manual Call Point	DHI-HY-C123	Manual Call Point